



Florenceville Middle School

8794 Main Street, Florenceville-Bristol, NB E7L 3G2


Phone: (506) 392-5115 Fax: (506) 392-5118

Grades: 6-8

Built: 1955

Functional Capacity Data	Student Enrollment	Number of Classrooms	Classrooms In Use	School Capacity	Capacity Rating
based on 29 students per class	204	17	10	493	41.4%

School Enrollment Trends 2001 to Present

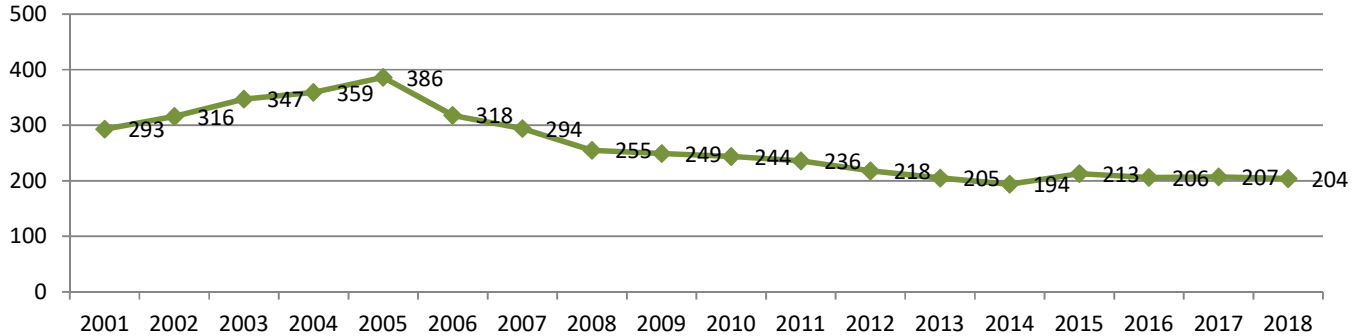

Physical Description:

- Built in 1955
- Electrical entrance is 600 amps, 120/240 volt. The equipment is old. There is limited capacity available for more circuits.
- Exterior lighting is H.I.D. (High Intensity Discharge)
- Interior lighting is fluorescent in good condition.
- Heating system – has 2 boilers
- There is one old exhaust fan that services the showers.
- The school controls the heating system.
- Air quality is fair.
- Washrooms and showers are in poor condition –upgrading in 2005.
- Playground is considered very good with various apparatus, a soccer field, ball field.
- Windows are in poor condition – upgraded in the 1980's
- Exterior doors are in good condition. The side entrance was new in 2005.
- There is a cafeteria in fair condition.
- Floors are tile.
- Ceilings in the hallways and classrooms are suspended.
- Painting is done according to a summer schedule.
- Interior doors are wood, some are fire rated and some are not.
- Stairways are enclosed to meet fire separation requirements complete with fire rated doors, frames and hardware. There are no fallfree barriers.
- Gymnasium floor is made of wood in good condition. Square footage is 4122 square feet.
- There is no wheel chair access to the stage.
- There is proper access to the roof.
- Corridor walls are plaster and ceramic.
- There is a Whirltec lift with a capacity of 1000 pounds.
- Parking is adequate that is paved on the front and one side and in good condition. Parking at the other side and rear is gravel and has many potholes.
- Water supply is a well with an ultra-violet system and backflow prevention.
- Roof does not leak.
- Land ownership around the school is commercial.
- There is room to expand and the neighborhood is appropriate to maintain a school facility for years to come.
- The school is 3,948 square meters.
- There are no known environmental concerns.



Florenceville Middle School

8794 Main Street, Florenceville-Bristol, NB E7L 3G2

Phone: (506) 392-5115 Fax: (506) 392-5118

Grades: 6-8

Built: 1955

Operational Costs

Electricity	\$	16,362.05
Water/Sewage	\$	8,002.98
Garbage Removal	\$	3,910.92
Snow Plowing	\$	7,749.96
Heating Fuel	\$	38,786.74
Natural Gas	\$	-
Cleaning Supplies/Services	\$	4,171.14
Minor Repairs/Renovations	\$	28,441.50
Total	\$	107,425.29

Operational Costs Per Square Meter \$ 27.21

Based on: 3948 Sq Meters

Operational Costs Per Student \$ 521.48

Based on: 204 Enrollment



Florenceville Middle School

8794 Main Street, Florenceville-Bristol, NB E7L 3G2

Phone: (506) 392-5115 Fax: (506) 392-5118

Grades: 6-8

Built: 1955

Feeder Schools

Students move to Carleton North High School for grades 9-12. Students from Bristol Elementary School, Florenceville Elementary School, feeder into Florenceville Middle School along with students in grade 6 French Immersion from Centerville Community School.

Catchment Area Boundaries


North to #9280 Route 105, #1360 Route 570, #770 East Coldstream Road and Route 110 with Hume Road and Hilltop Crescent added; West to #350 Dryer Road; East to include the East Coldstream Road; South to #3495 Route 103, #7416 Route 105, #10365 Route 130 and #110 Route 570.



Florenceville Middle School
 8794 Main Street, Florenceville-Bristol, NB E7L 3G2
 Phone: (506) 392-5115 Fax: (506) 392-5118
 Grades: 6-8
Built: 1955

Enrollment 2013-2018

	2013	2014	2015	2016	2017	2018
5 (FI)	N/A	N/A	N/A	N/A	N/A	N/A
6	62	66	77	61	73	69
7	65	63	73	73	60	74
8	78	65	63	72	74	61
Total	205	194	213	206	207	204

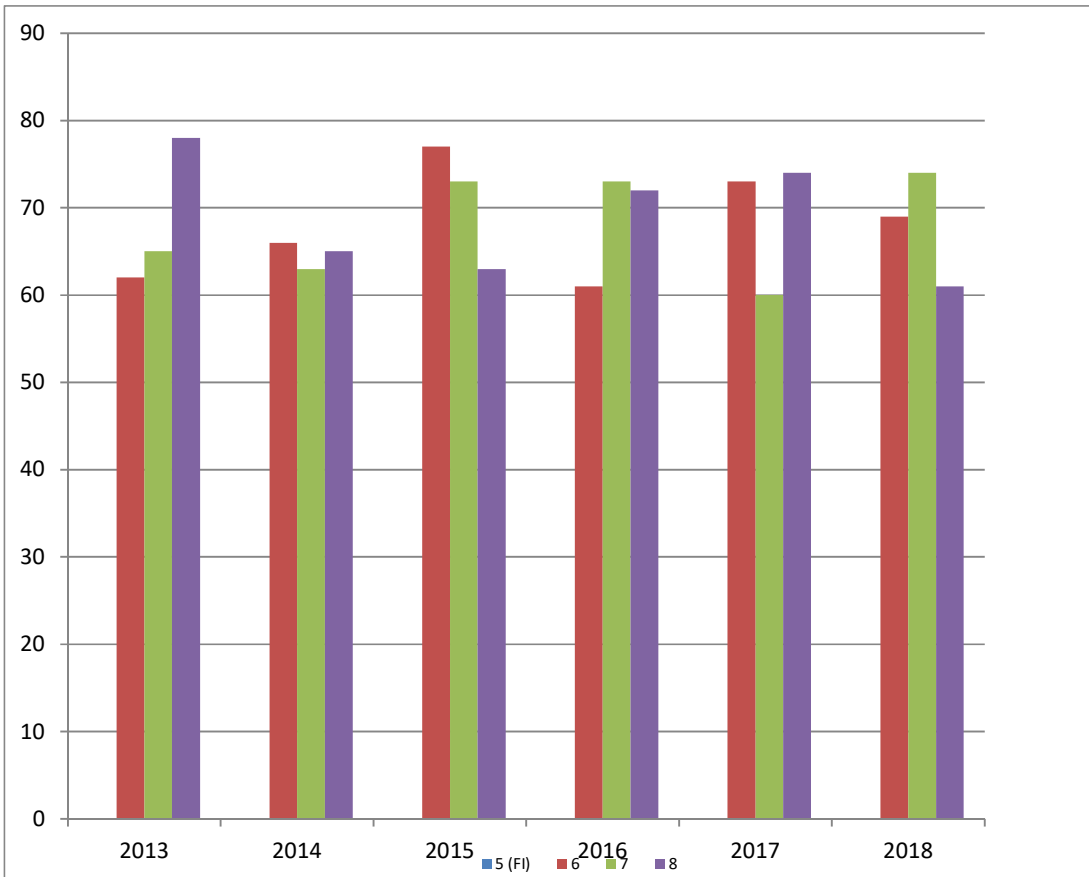



Florenceville Middle School

8794 Main Street, Florenceville-Bristol, NB E7L 3G2

Phone: (506) 392-5115 Fax: (506) 392-5118

Grades: 6-8

Built: 1955

Major Capital and Capital Improvements Projects 2010-2019

School Year	Project	Capital Improvements	Major Capital
2009-2010	Radon	\$ 9,423	
2009-2010	Roof Replacement	\$ 16,128	
2010-2011	Radon	\$ 97,300	
2010-2011	Roof Replacement	\$ 218,217	
2017-2018	Window Replacement	\$ 235,000	
2017-2018	Site Improvement	\$ 165,000	
Total		\$ 741,068	\$ -